



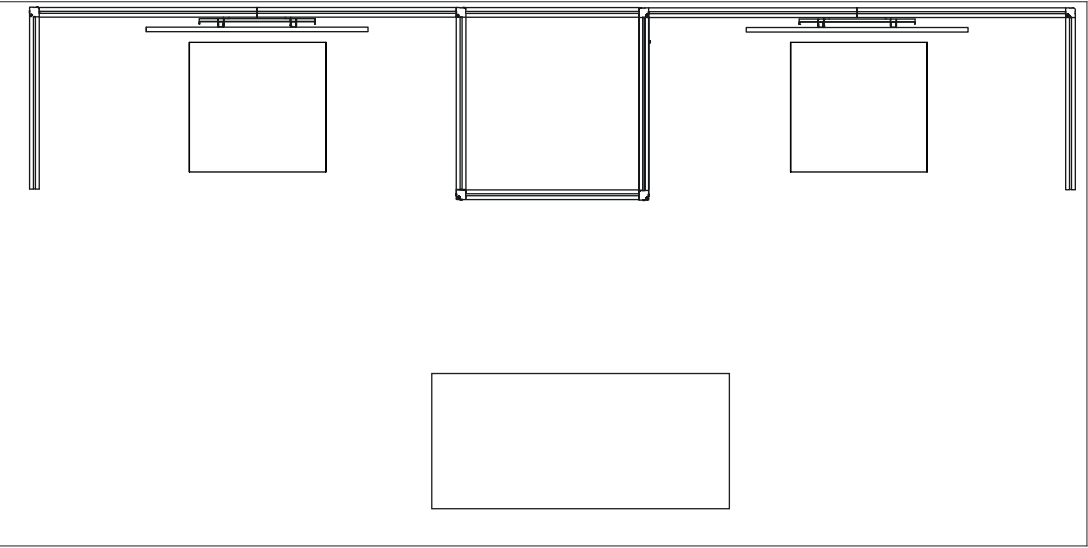



20'

Plan View

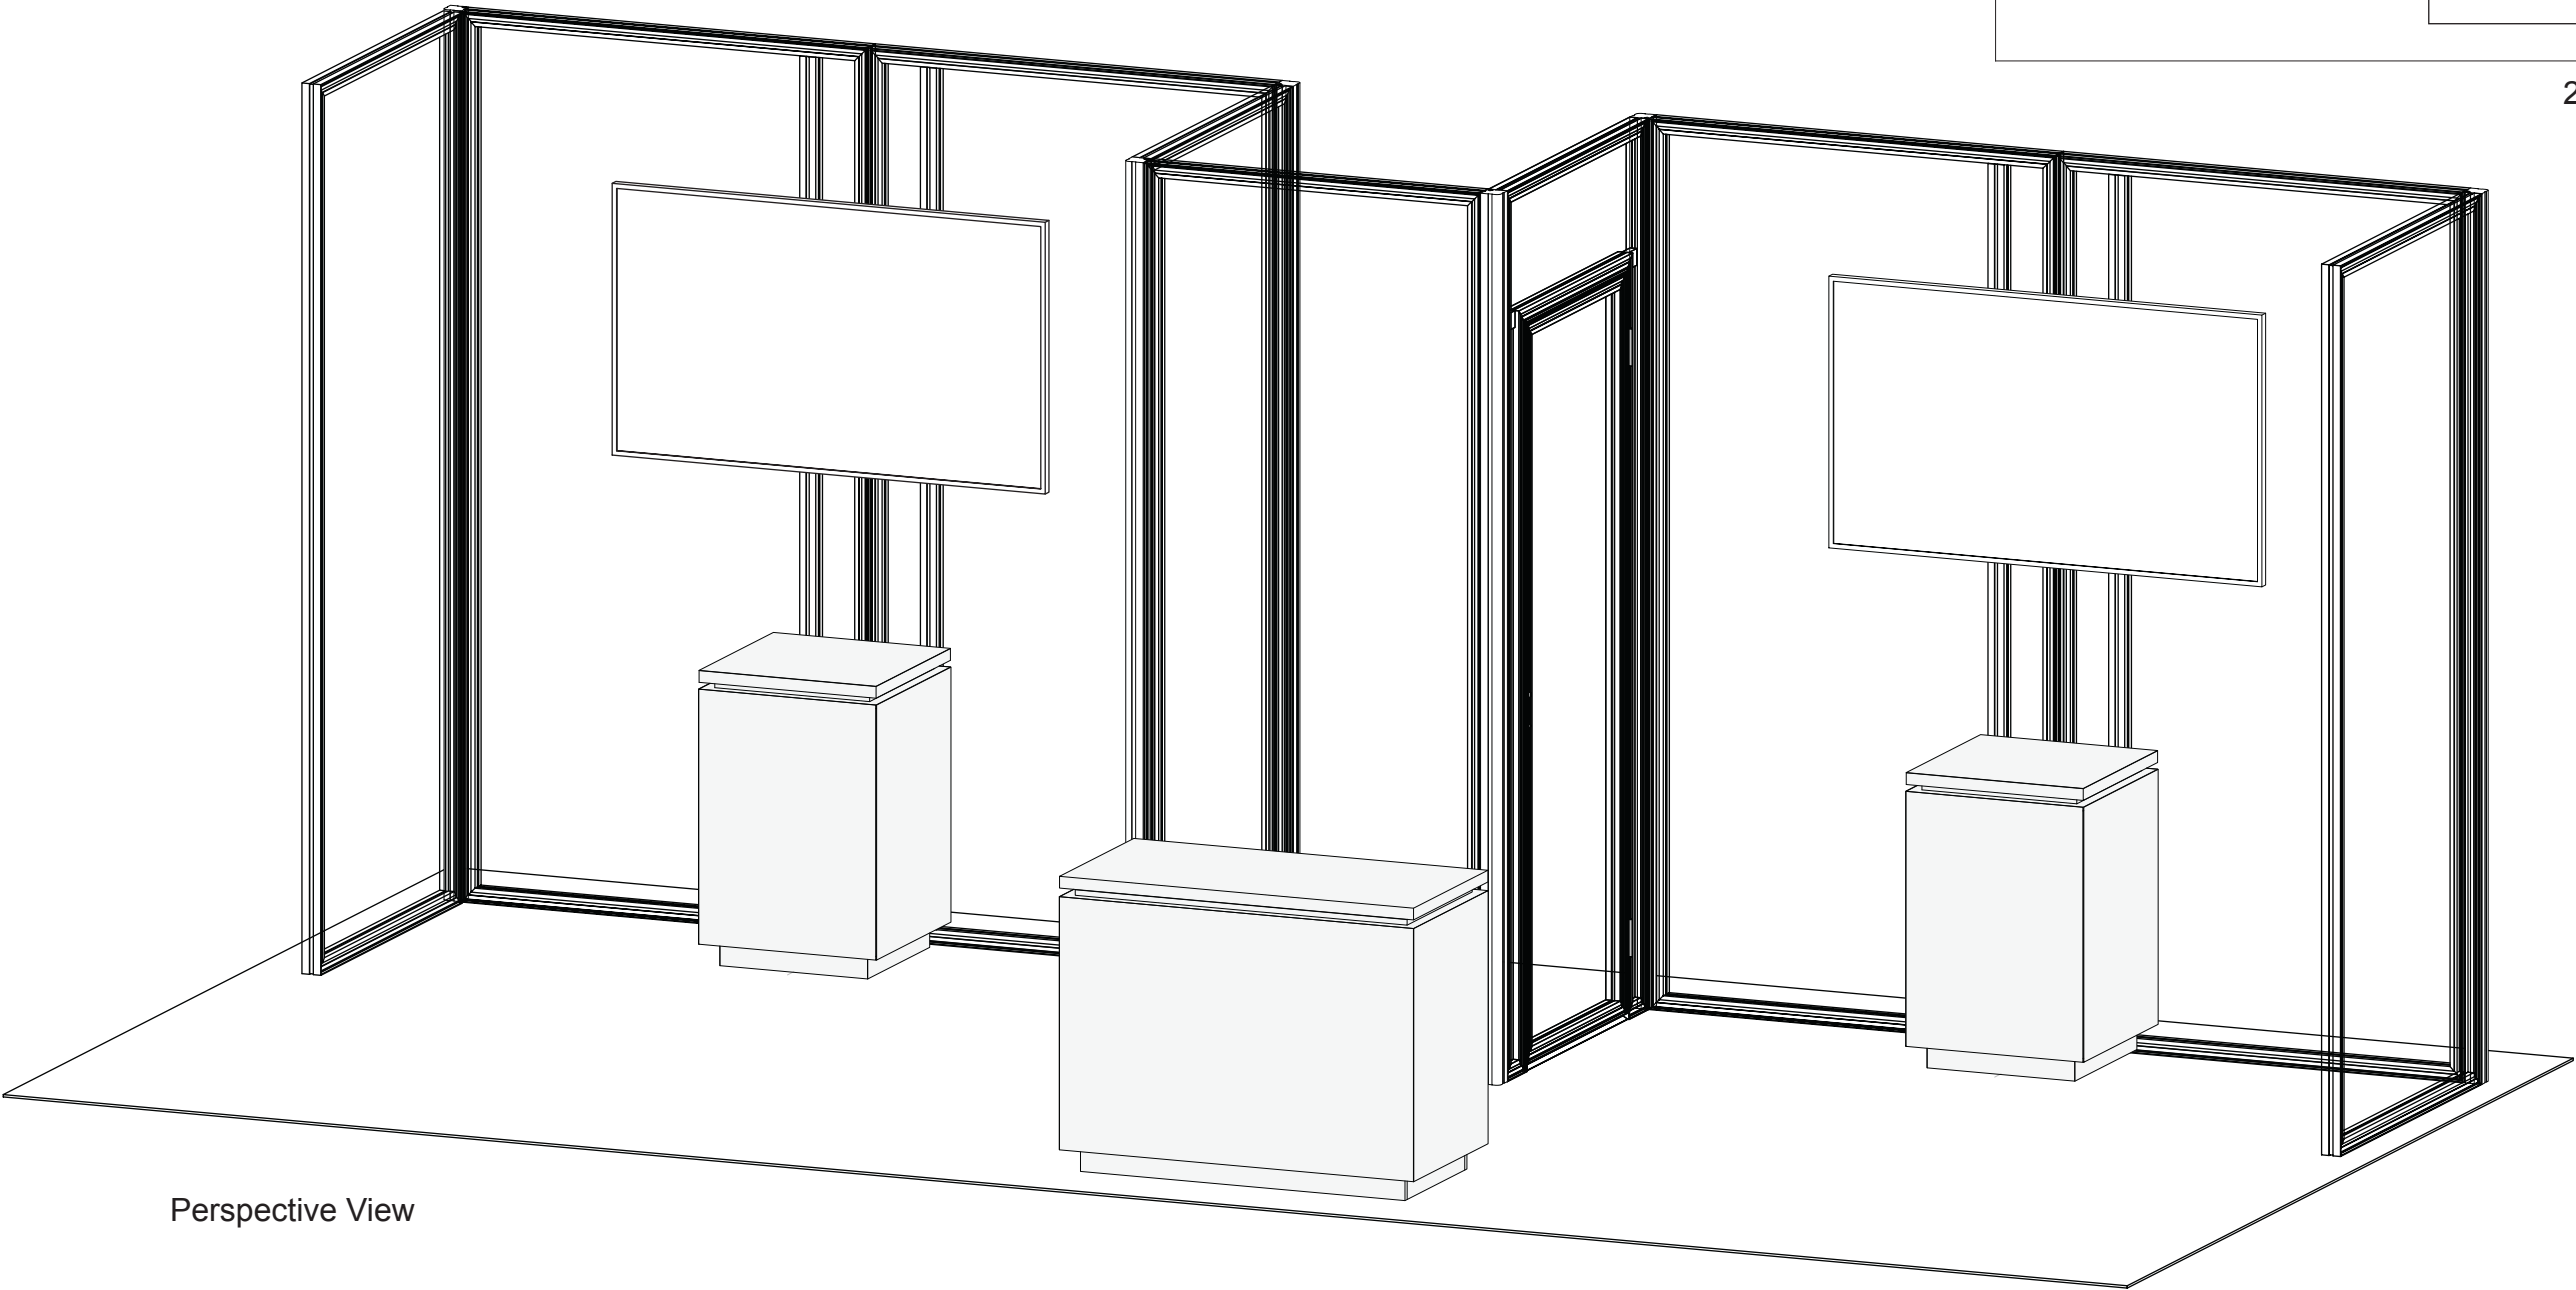

Perspective View

SETUP INSTRUCTIONS

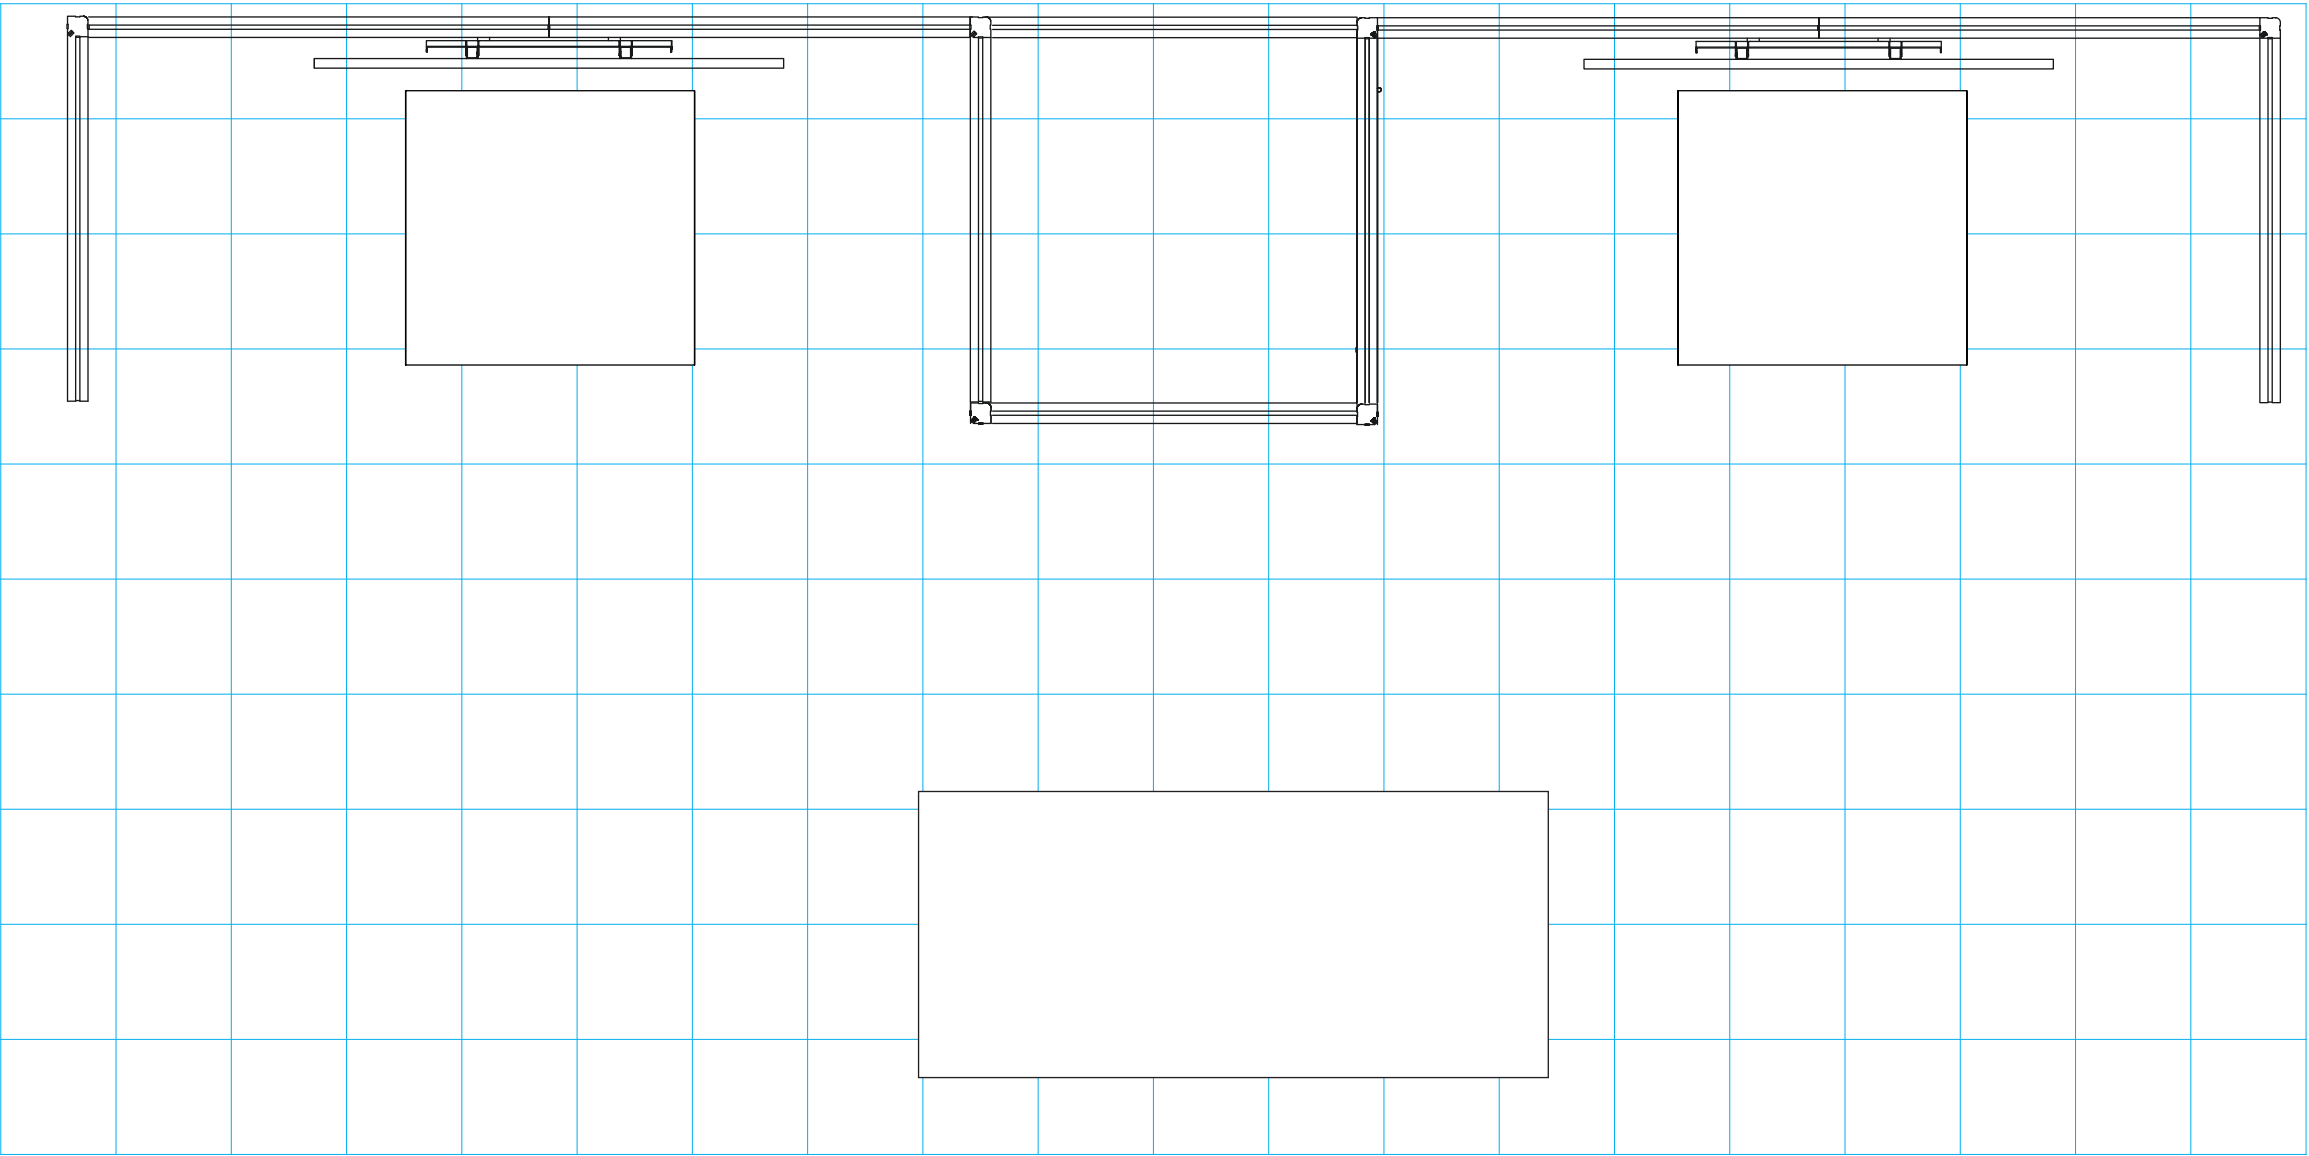

Plan View

20'

10'

General Setup Instructions

- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.


Cleaning & Packing

- For Cleaning Metal, Plex, & Laminate Parts:
Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure.
Heat and UV exposure will warp and fade components.
- Retain all provided Packing Materials.
All provided packing materials are for ease of repacking & component protection.


Disassembly

- For loss prevention, tighten all set screws and locks during disassembly.

Assembly

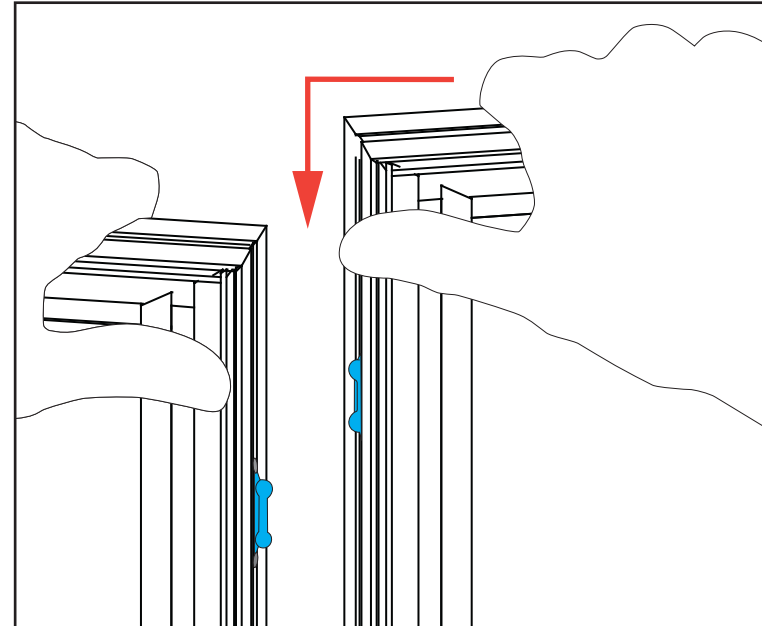

Assembly Cont'd

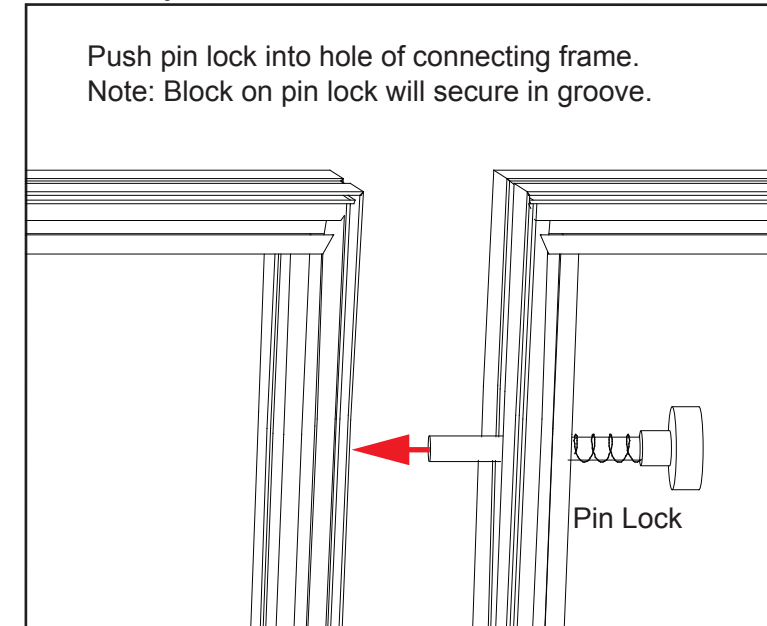


Side-by-Side Assembly

- 1) Frames: Place frames side-by-side with one higher than the other, then slide panel down to lock panels securely together.
- 2) Corner Connectors: Repeat Step 1 for installing corner connectors to frames.


Side-by-Side Disassembly

- 1) Pull pin lock outwards to disengage.
- 2) Pull frames upward and apart at the same time to detach.


SEG Graphic Installation




It is important to first insert graphic into each alternate corner, then to the sides of the frame.
If this is not done, graphic will not fit into the frame correctly.



Step 1
Insert corner A.
Turn edge of graphic so silicon welt is perpendicular to face of graphic. Insert narrow side of welt with fabric to outside into the channel. Repeat for other side of this corner.




Step 2
Repeat Step 1 for opposite corner C, then insert corner B, followed by corner D, to complete the installation of the corners.



Step 3
Once all corners are inserted, press one silicon edge into channel from corners and work toward the center. Make sure welt is fully inserted into channel. Continue until all sides are done. Smooth out edges of graphic.


Graphic Removal




To remove the graphic from the frame, locate the fabric pull tab. Gently pull up on the tab to remove the fabric.

Item	Qty.	Description
1	1	38"w x 95"h Gravitee Panel
2	1	94.5"h Gravitee Corner Post w/ Caps
3,4	1,1	46"w x 95"h Gravitee Panel w/ S44
5	1	94.5"h Gravitee Corner Post w/ Caps
6	1	38"w x 95"h Gravitee Panel
7	1	94.5"h Gravitee Corner Post w/ Caps
8	1	38"w x 95"h Gravitee Panel
9	1	94.5"h Gravitee Corner Post w/ Caps
10	1	38"w x 95"h Gravitee Panel w/Door
11	1	94.5"h Gravitee Corner Post w/ Caps
12	1	38"w x 95"h Gravitee Panel w/ Infill Panel
13,14	1,1	46"w x 95"h Gravitee Panel w/ S44
15	1	95"h Gravitee Corner Post w/ Caps
16	1	38"w x 95"h Gravitee Panel

Steps:
1) Assemble panels and connectors [1] thorough [16], in numerical order, as shown. See the Gravitee Assembly general information sheet for instruction.

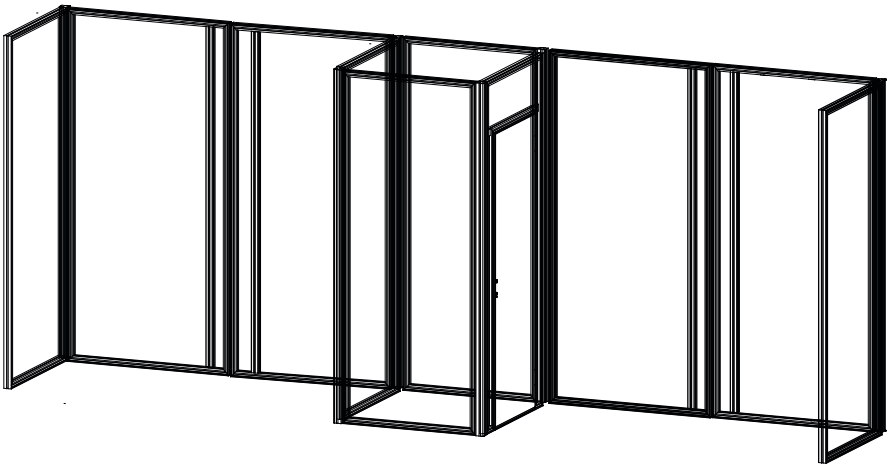


Completed Assembly

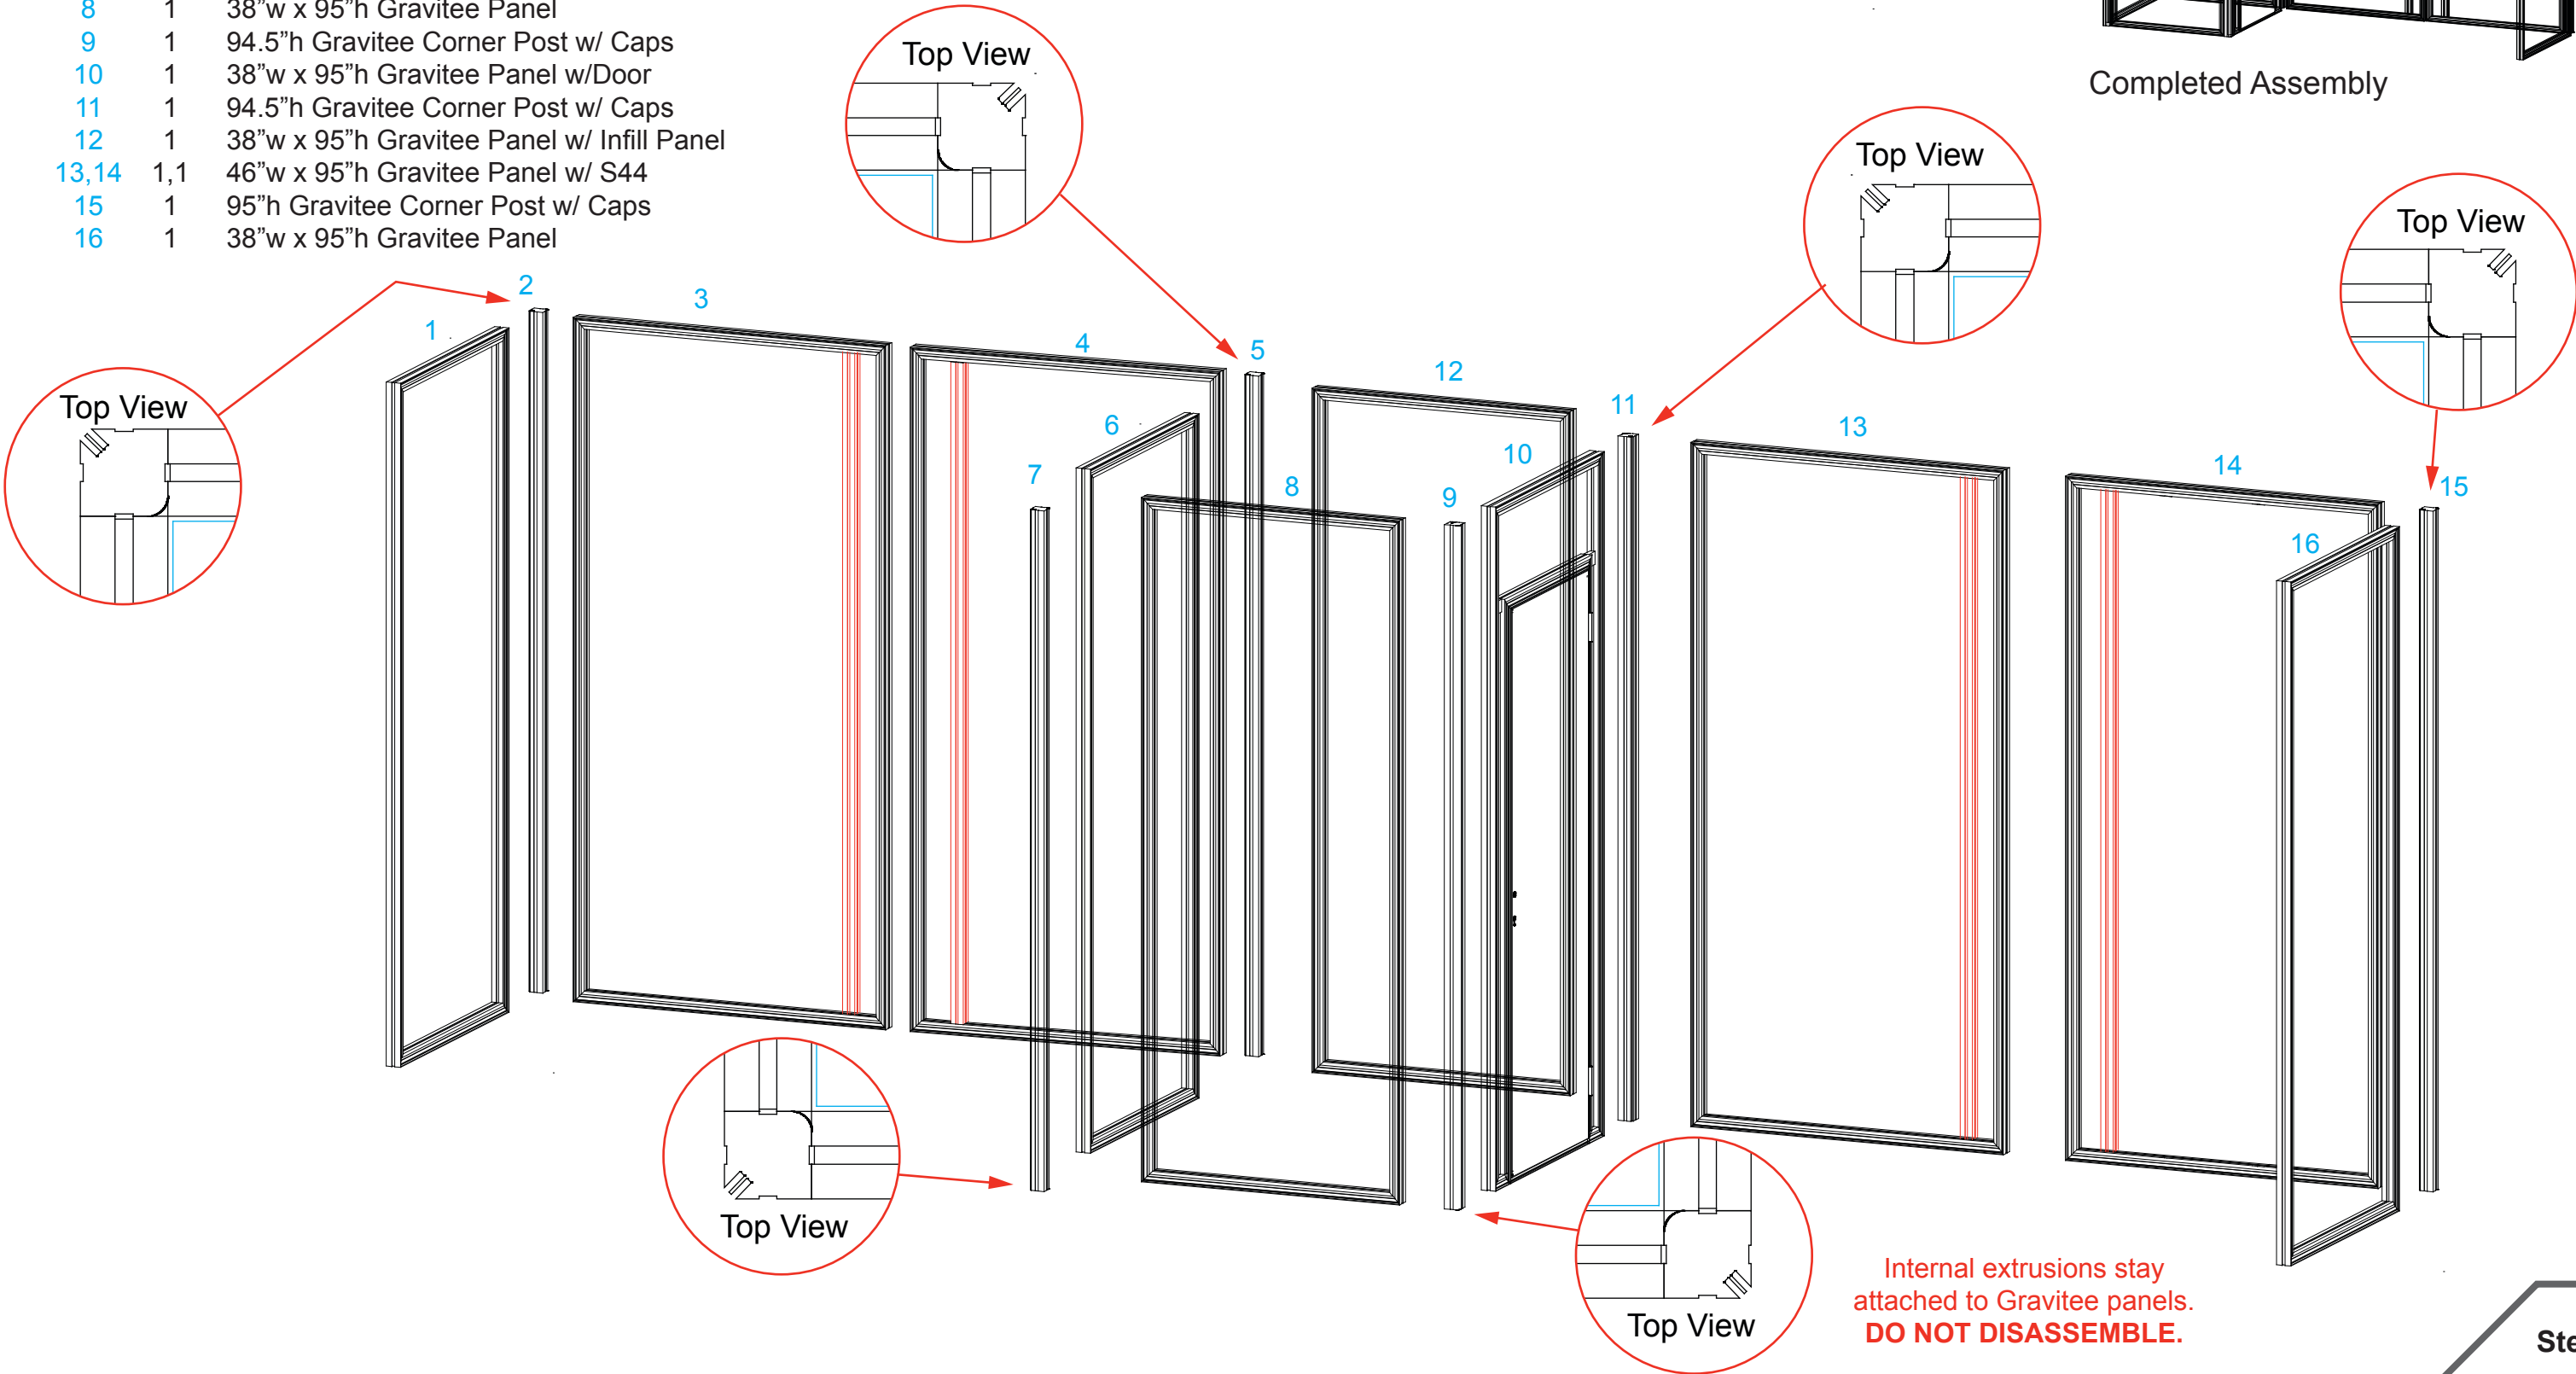

Item	Qty.	Description
--	2	Monitor Mounts


- Steps:
- 1) Install SEG graphics to backwall. See the General Information sheet for instruction.
Note: Panel [12] at the back of the closet has Sintra Infill not SEG.
 - 2) Attach monitor mounts to panels [3/4] and [13/14]. See [Monitor Mount Attachment](#) detail.

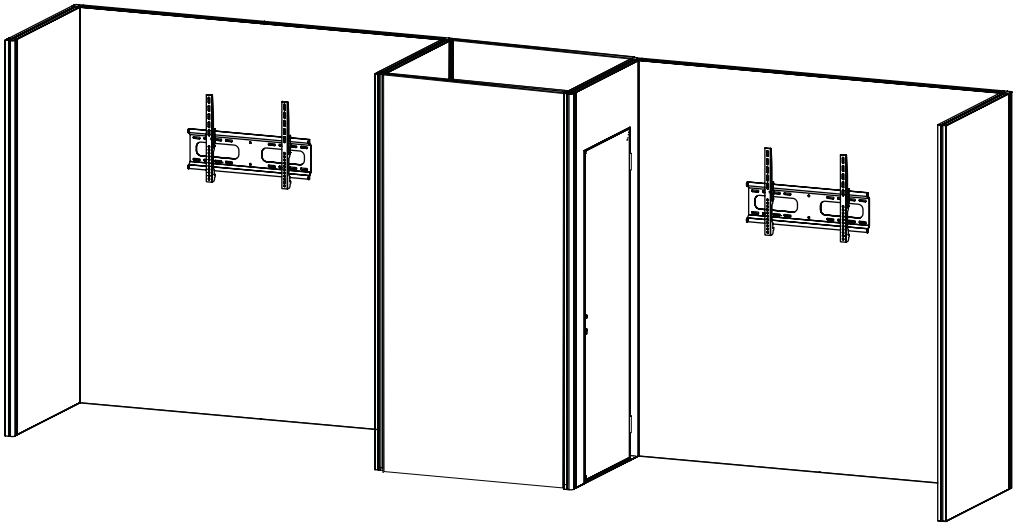

Completed Assembly


* Monitor Mount Attachment

- 1) Slide V4 connectors into vertical extrusions, then tighten set screws to secure.

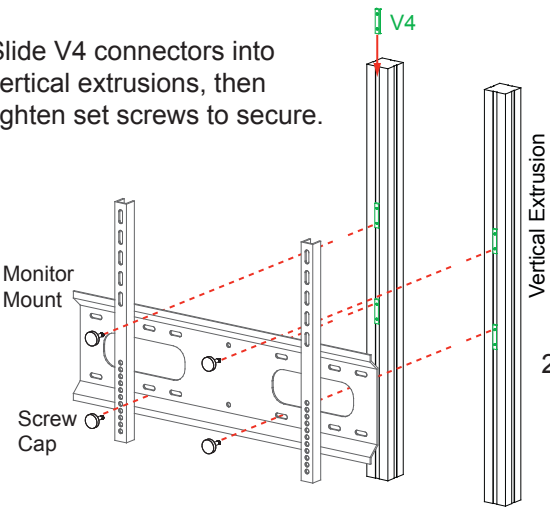

- 2) Attach monitor mount to V4 connectors using screw caps.

Monitor mount installs over fabric graphic.

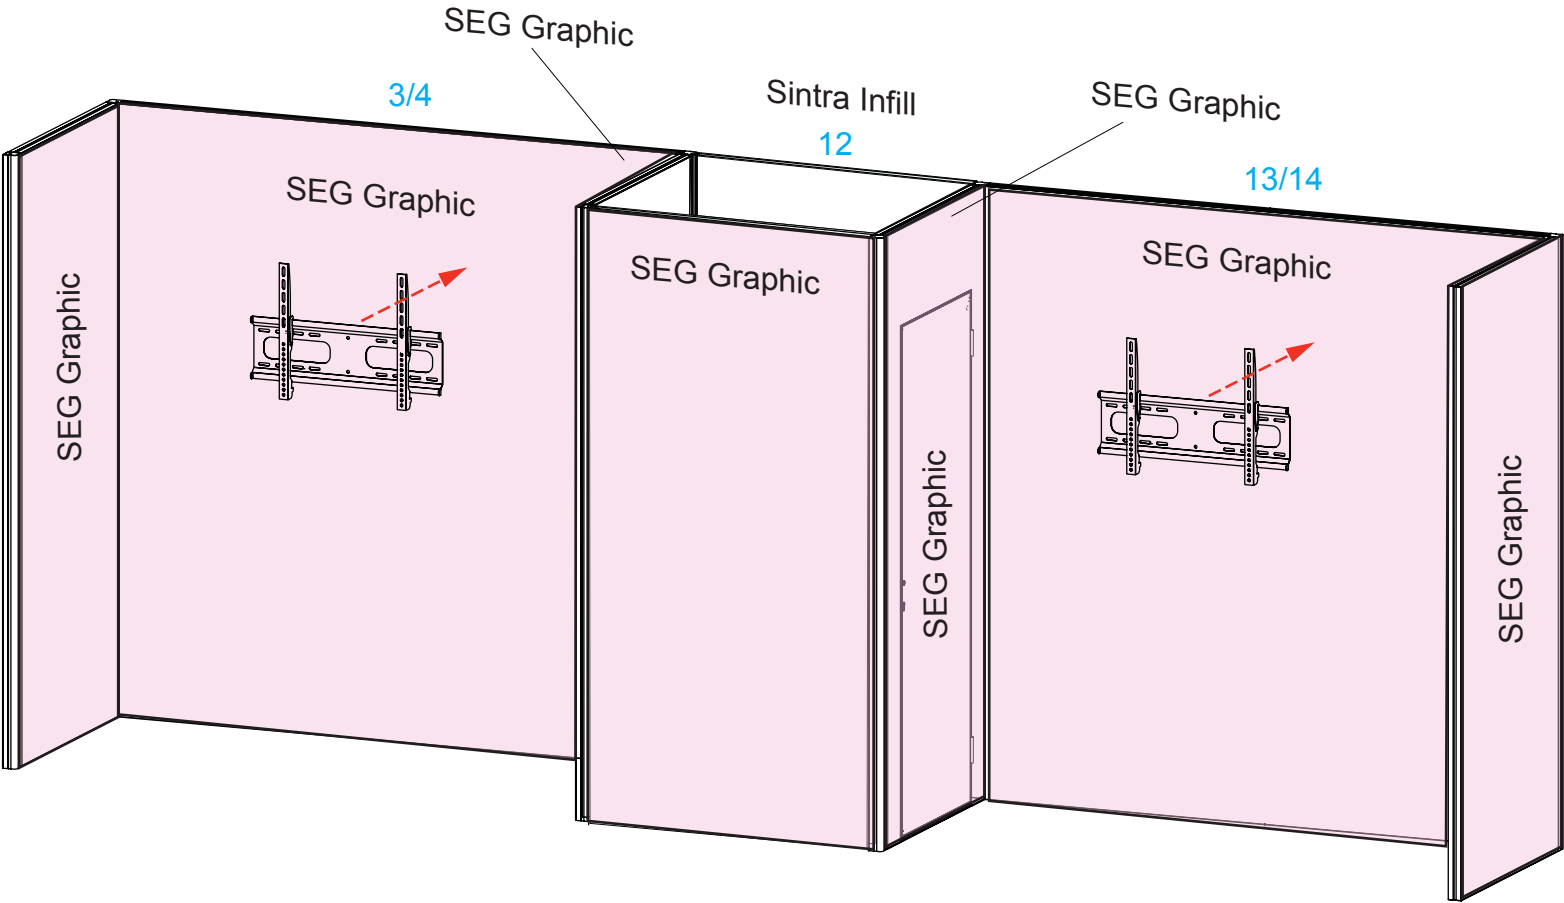

Controlling the RGB LED lights

Static Mode:

1. Use the Color Ring key to select a color.
2. Saturation is controlled with W/R/G/B keys.
3. White mode is available by long-pressing 'ON' key.
4. Colors (not white) are dimmable with the Brightness key.

Dynamic Mode:

Press "M" key to cycle through the following options:

1. White light fades in and out.
2. Several colors fade in and out.
3. R,G,B three colors fade in and out.
4. R,G,B three colors flash.
5. Six colors flash.
6. Random color flashes.
7. Red color fades in and flashes.
8. Green color fades in and flashes.
9. Blue color fades in and flashes.


To Pair a Remote with Multiple Units:

1. Power on the lights.
2. Press 'ON' key within 3 seconds.
3. Lights will blink when link is made.

To unpair: Long press 'ON' key within 3 seconds after switching on lights.

Remotes can be paired with one or more receivers.
Different receivers can work synchronously even when started at different times (within 30 min).

Function of Keys

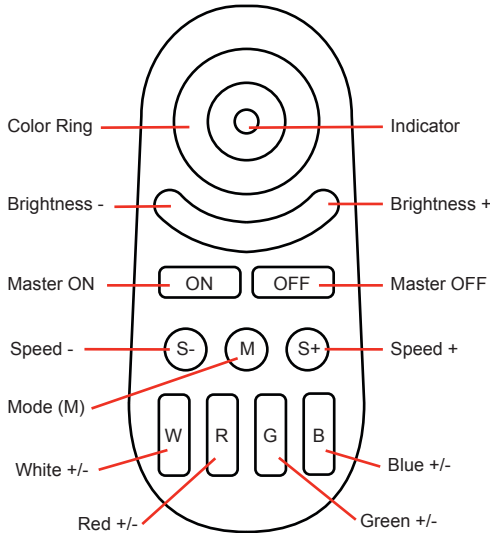


Specifications:

Receiver:
1. Working voltage: DC12V/24V
2. Output: Max. 6A/Channel
Total output Max. 10A
3. Max standby power: 0.5W

Remote Control:
1. Working voltage: 3V
2. Standby power: <20uA
3. Transmitting power: 6dBm

Steps:


- 1) Connect power cords to LED Lights in Counters, as shown.

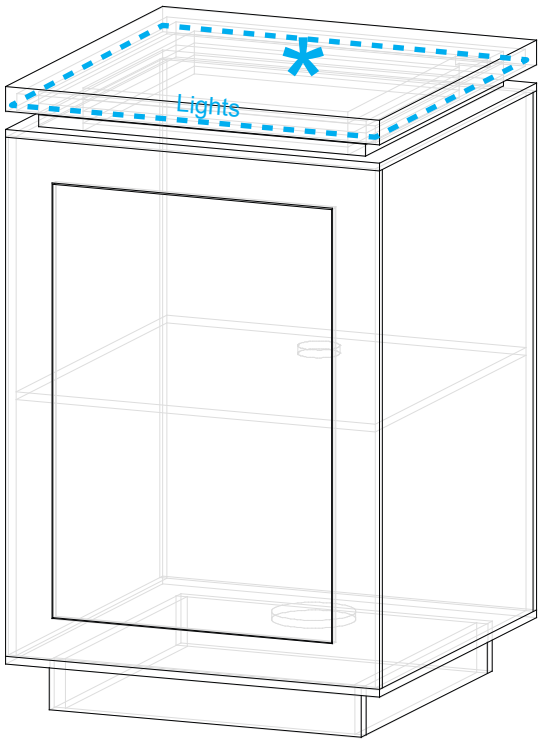

MOD-1593

* RGB LED Power Cord Attachment

Connect transformer to RGB LED Controller.
Then connect transformer to power source.

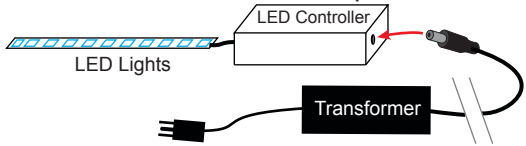

Controlling the RGB LED lights

Static Mode:

1. Use the Color Ring key to select a color.
2. Saturation is controlled with W/R/G/B keys.
3. White mode is available by long-pressing 'ON' key.
4. Colors (not white) are dimmable with the Brightness key.

Dynamic Mode:

Press "M" key to cycle through the following options:

1. White light fades in and out.
2. Several colors fade in and out.
3. R,G,B three colors fade in and out.
4. R,G,B three colors flash.
5. Six colors flash.
6. Random color flashes.
7. Red color fades in and flashes.
8. Green color fades in and flashes.
9. Blue color fades in and flashes.


To Pair a Remote with Multiple Units:

1. Power on the lights.
2. Press 'ON' key within 3 seconds.
3. Lights will blink when link is made.

To unpair: Long press 'ON' key within 3 seconds after switching on lights.

Remotes can be paired with one or more receivers.
Different receivers can work synchronously even when started at different times (within 30 min).

Function of Keys

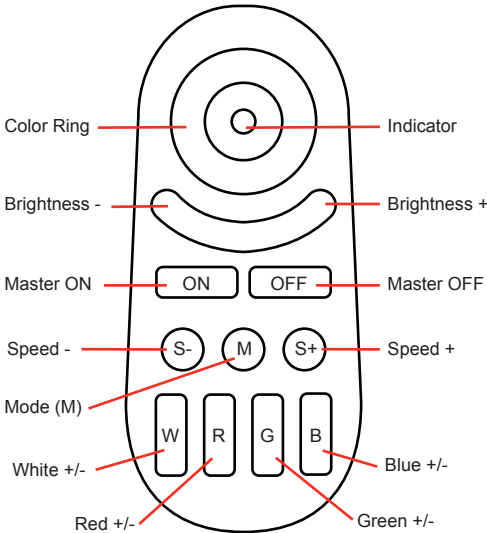


Specifications:

- | | |
|-------------------------------|-----------------------------|
| Receiver: | Remote Control: |
| 1. Working voltage: DC12V/24V | 1. Working voltage: 3V |
| 2. Output: Max. 6A/Channel | 2. Standby power: <20uA |
| Total output Max. 10A | 3. Transmitting power: 6dBm |
| 3. Max standby power: 0.5W | |

Steps:

- 1) Connect power cords to LED Lights in Counters, as shown.

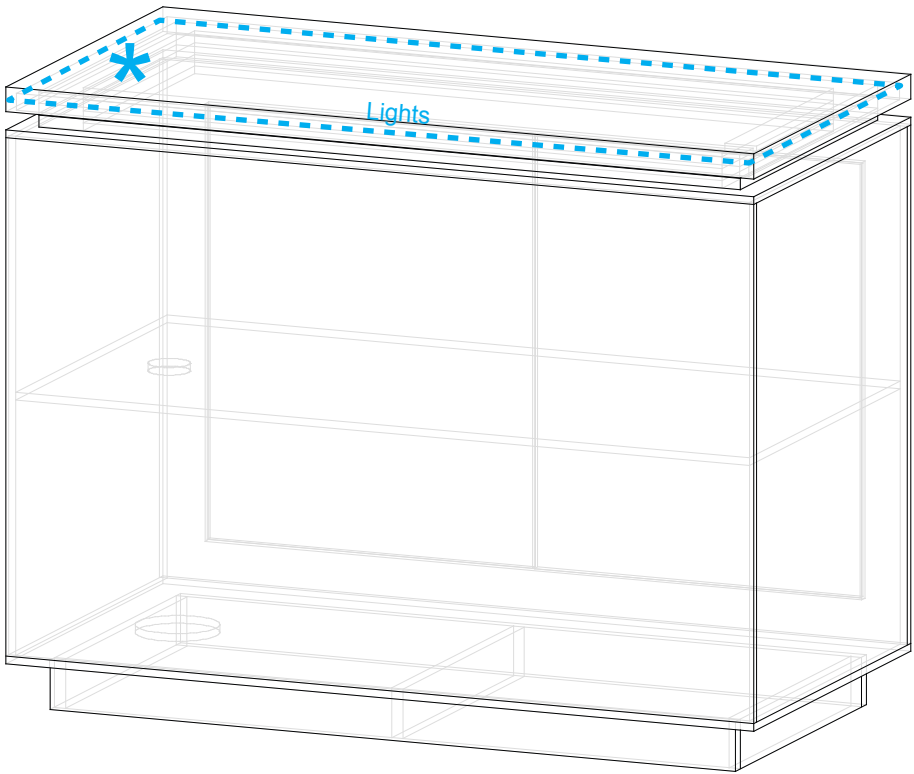

MOD-1596

* RGB LED Power Cord Attachment

Connect transformer to RGB LED Controller.
Then connect transformer to power source.

