

# ***SETUP INSTRUCTIONS***

## General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

## Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. **Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

## Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

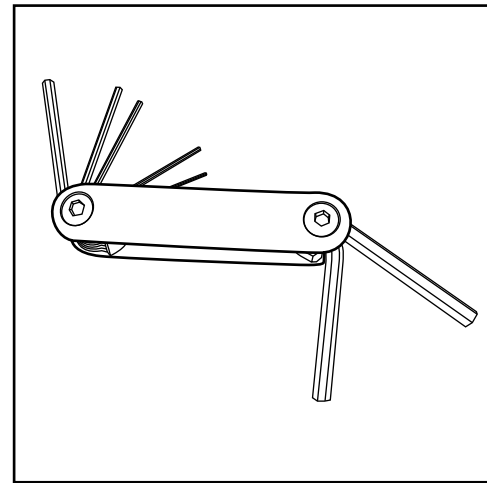


Hex Tool - Essential for Assembly

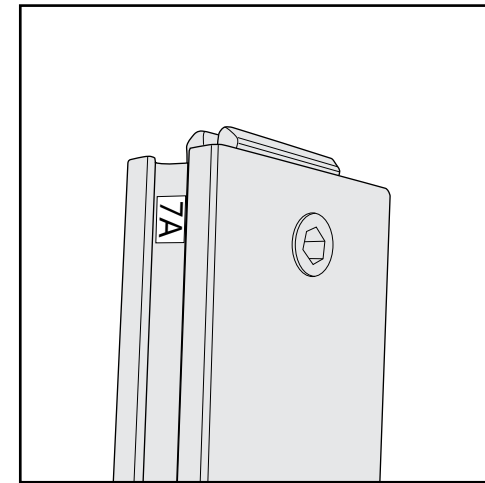


Part Identification - Numbering

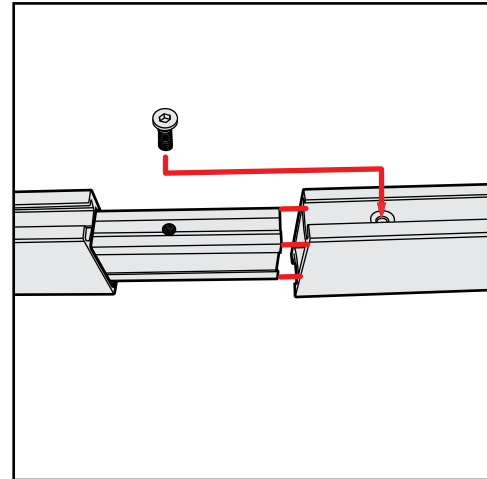


Spline Connection

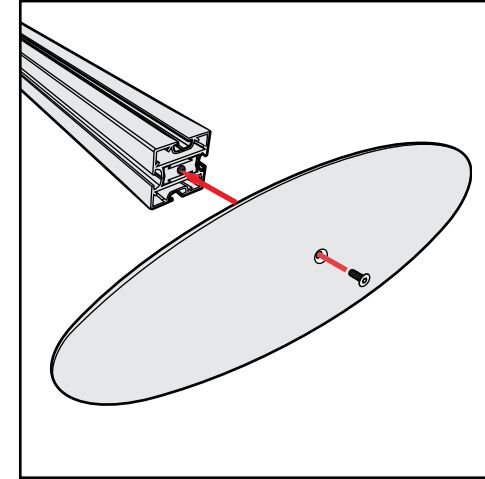

Base Plate & Extrusion Connection

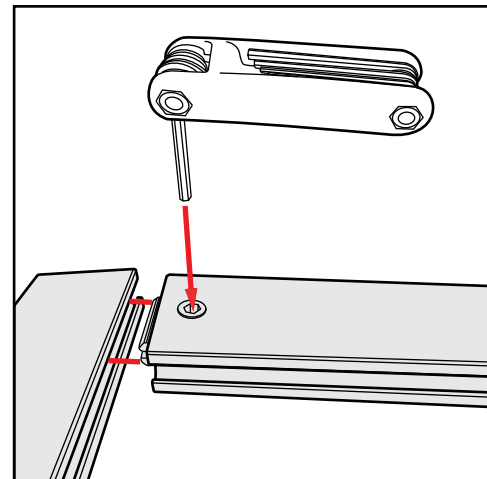

Extrusion & Lock Connection

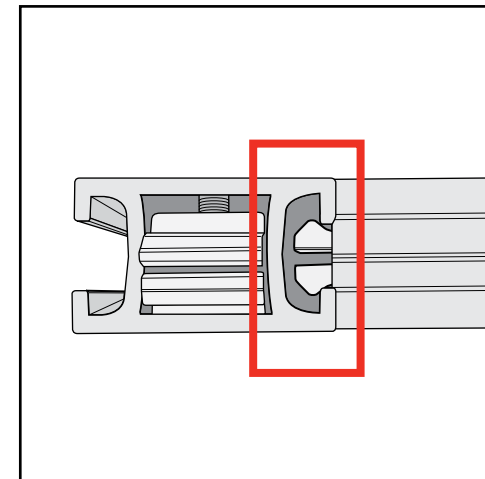


Engaged Lock



**WARNING**



DO NOT USE POWER TOOLS






LADDERS OR LIFTS  
MAY BE REQUIRED




ALL CONNECTIONS MUST  
BE TIGHTLY SECURED

Item	Qty.	Description
1	1	36" h Vertical Extrusion
2	1	36" h Vertical Extrusion w/ Door Hinges
3	1	36" h Vertical Extrusion w/ Door Stop
4	1	36" h Vertical Extrusion
5	4	26" w Horizontal Extrusion
6	4	18" w Horizontal Extrusion

- Steps:**
- 1) Attach lower horizontal bars between vertical extrusions.
  - 2) Place infill panels and attach door where indicated.
  - 3) Attach upper horizontal bars between vertical extrusions and atop infills and door.
  - 4) Velcro shelf supports to inside of assembled base.
  - 5) Set internal shelf atop supports.

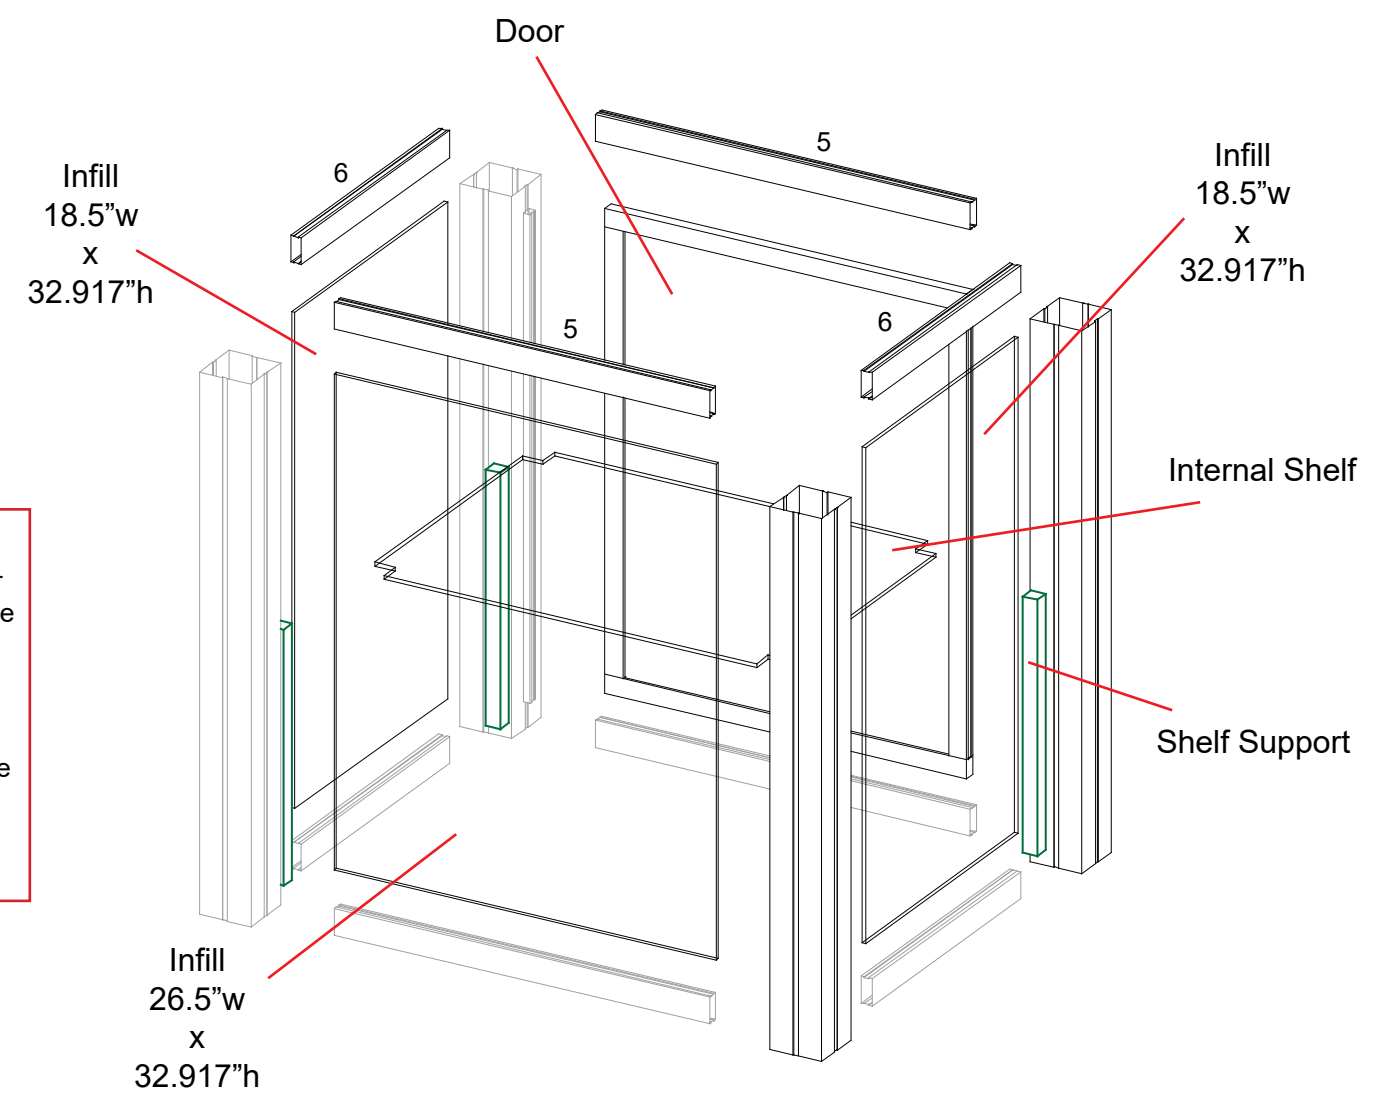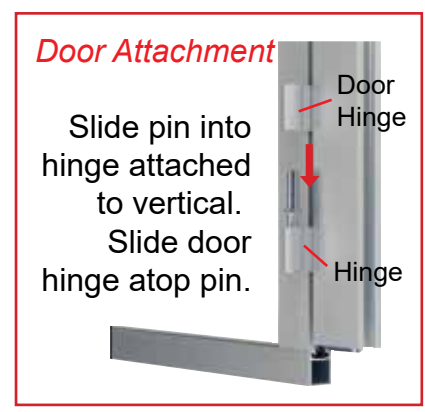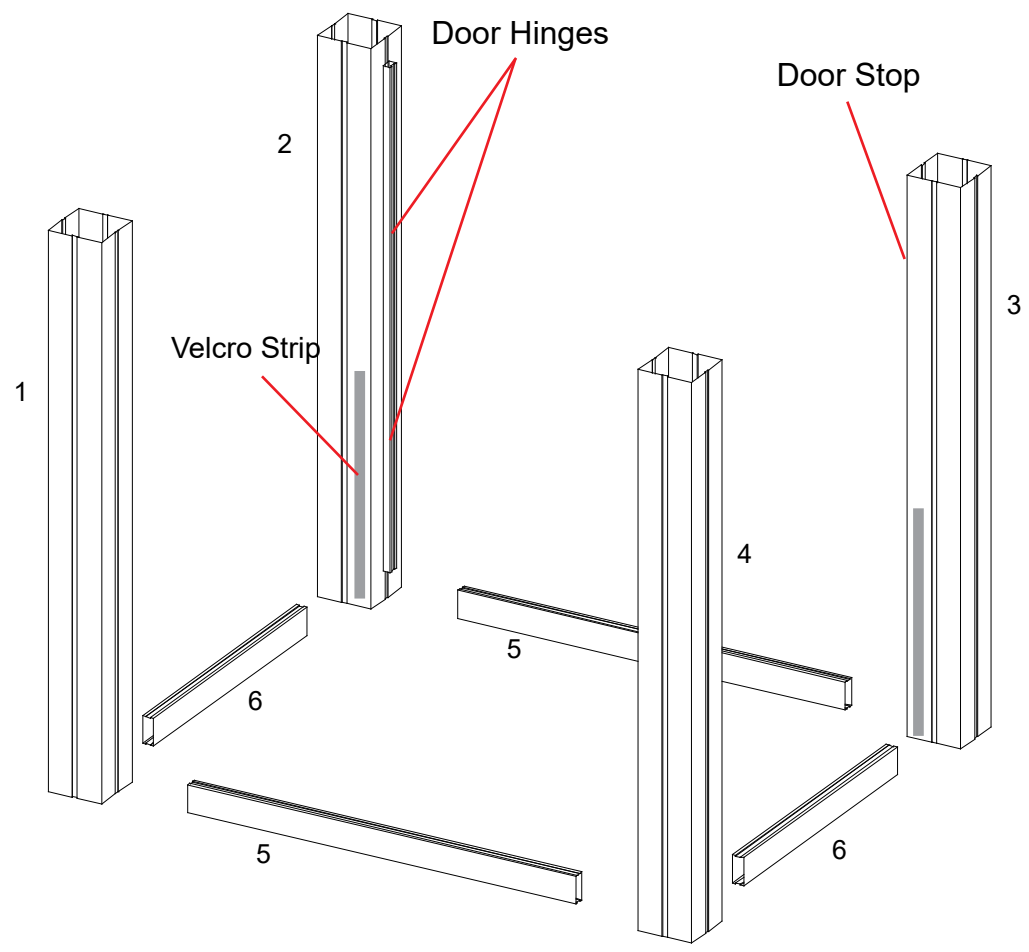


Item	Qty.	Description
7	1	36" h Vertical Extrusion
8	1	36" h Vertical Extrusion
9	3	12" w Horizontal Extrusion

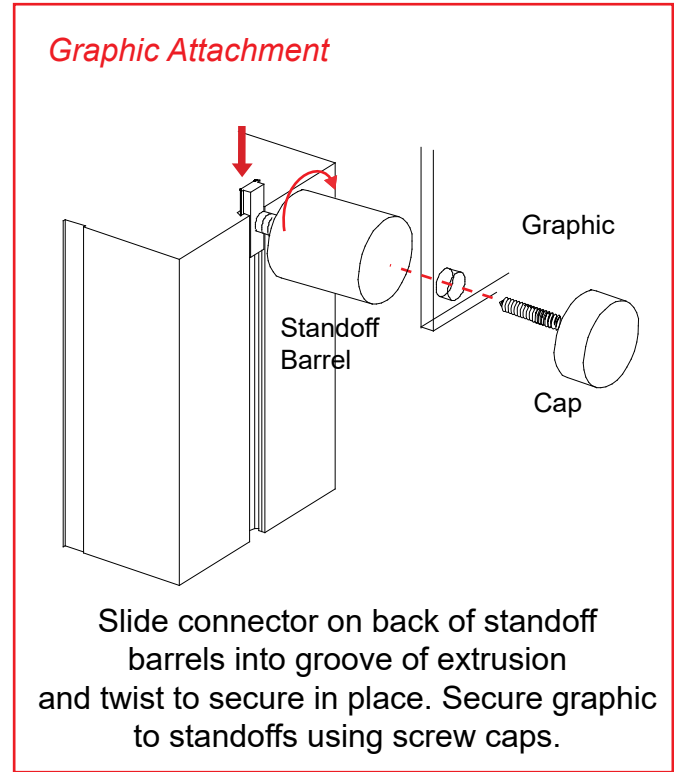

**Steps:**

- 1) Connect vertical extrusions [7 and 8] to assembled pedestal using horizontal extrusions [9].
- 2) Attach pin to vertical extrusion [4].
- 3) Set lower tier counter atop extrusions [7 and 8] and atop pin.
- 4) Set counter top on assembled pedestal.
- 5) Attach graphic to assembled pedestal using standoffs.

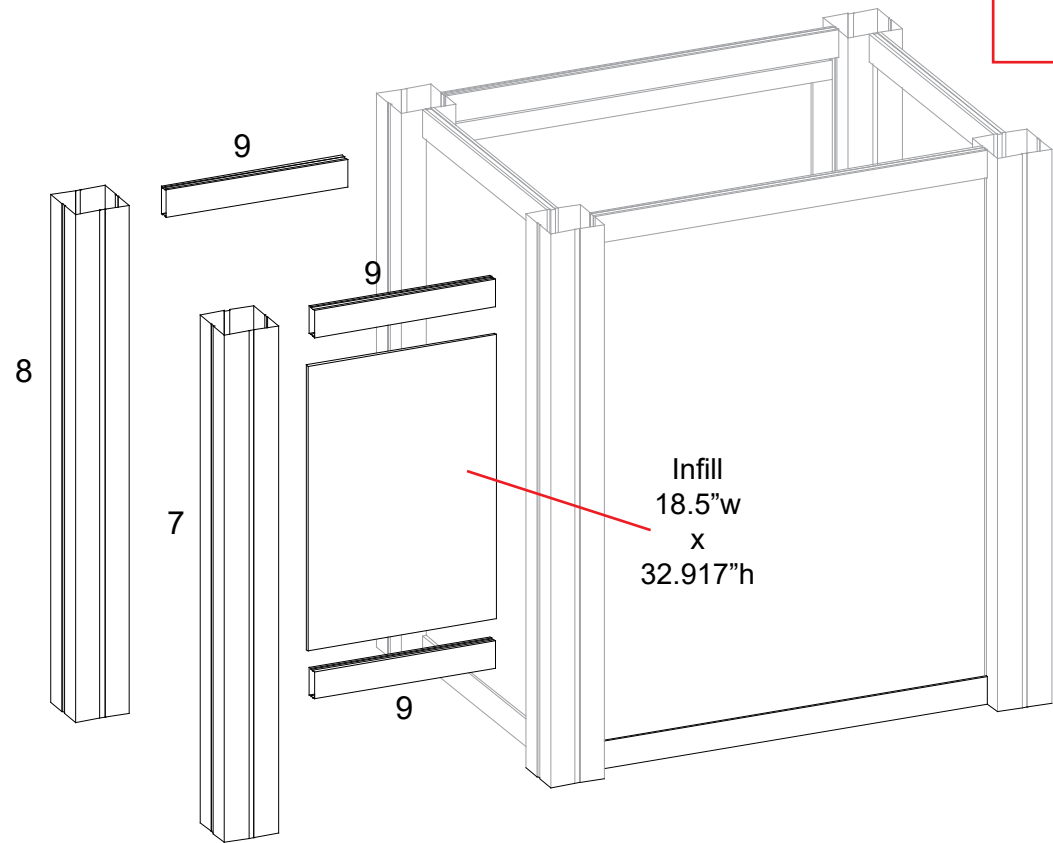

**Lower Tier Counter**

