



Front View

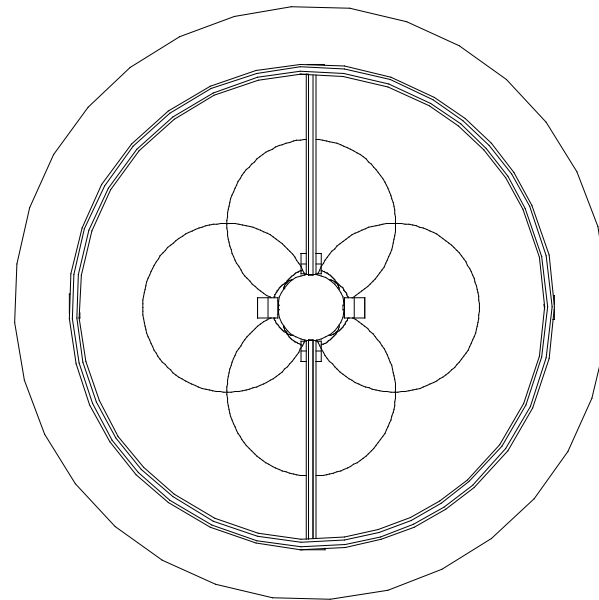

Plan View

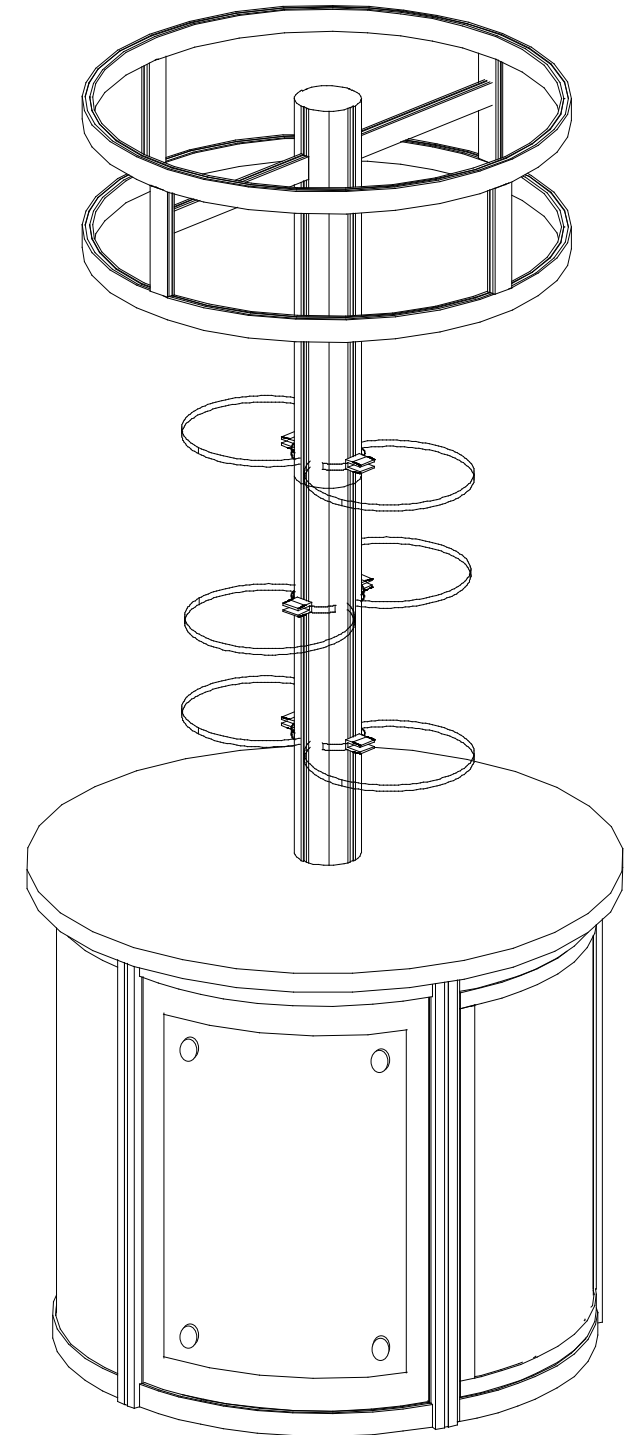

Iso View

# ***SETUP INSTRUCTIONS***

## General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

## Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. **Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

## Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

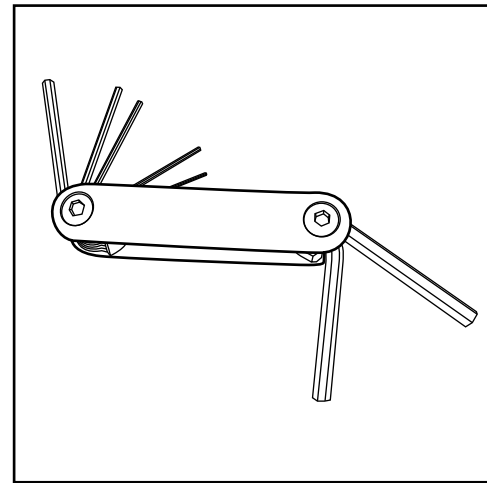


Hex Tool - Essential for Assembly

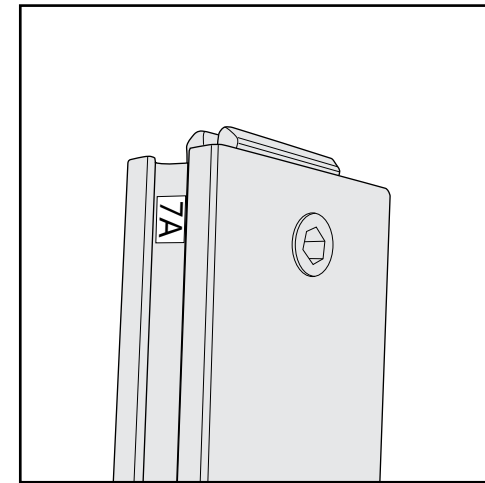


Part Identification - Numbering

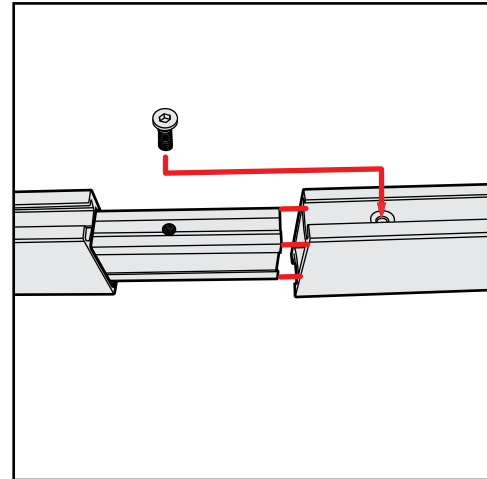


Spline Connection

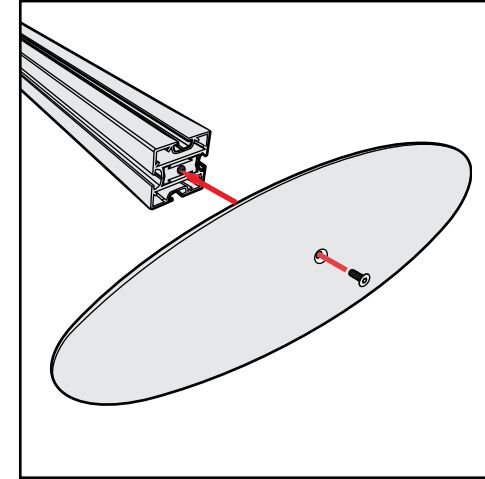

Base Plate & Extrusion Connection

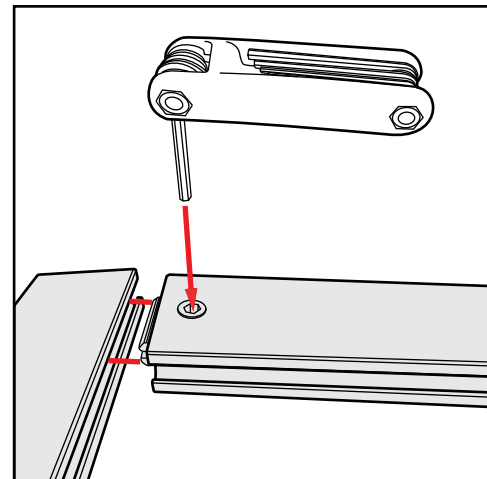

Extrusion & Lock Connection

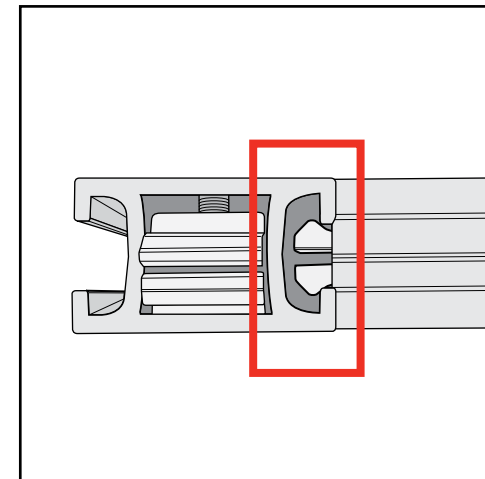


Engaged Lock



**WARNING**



DO NOT USE POWER TOOLS




LADDERS OR LIFTS  
MAY BE REQUIRED



ALL CONNECTIONS MUST  
BE TIGHTLY SECURED

## Top View of Each Level




Level 1  
*(Bottom level)*




Level 2



Level 3




Level 4



Level 5




Lights

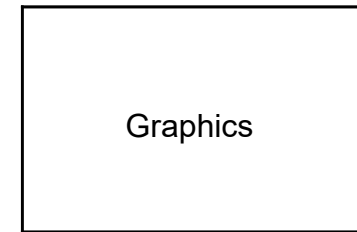

Graphics










Setup Hardware

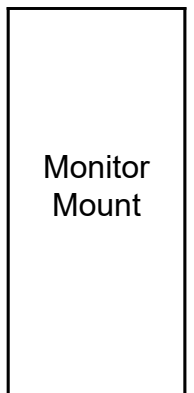

Monitor  
Mount

Item	Qty.	Description
1	1	36" h Vertical Extrusion w/ Door Hinges
2	1	36" h Vertical Extrusion w/ Door Stops
3	1	36" h Vertical Extrusion
4	1	36" h Vertical Extrusion
5	1	36" h Vertical Extrusion
6	5	23.3822" w Curved Horizontal Extrusion
7	5	23.3822" w Curved Horizontal Extrusion

- Steps:**
- 1) Connect lower horizontal extrusions [6] between vertical extrusions [1, 2, 3, 4 and 5] where indicated.
  - 2) Place infills and attach door where indicated.
  - 3) Connect upper horizontal extrusions [7] between vertical extrusions [1, 2, 3, 4 and 5].
  - 4) Attach graphics to infill where indicated using standoff barrals and caps as shown. Refer to detail.
  - 5) Attach verticals [8 and 9] together and bolt it to atop counter. Place counter atop assembled base.
  - 6) Attach shelves to verticals as shown using A10 clamps. Refer to detail.

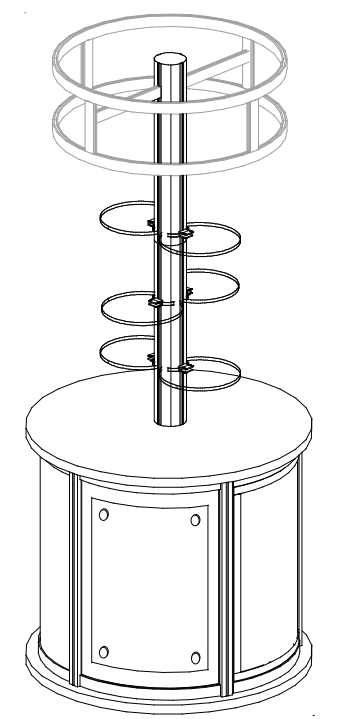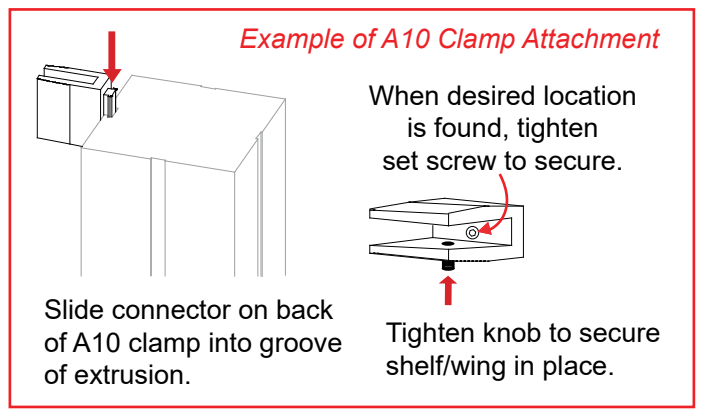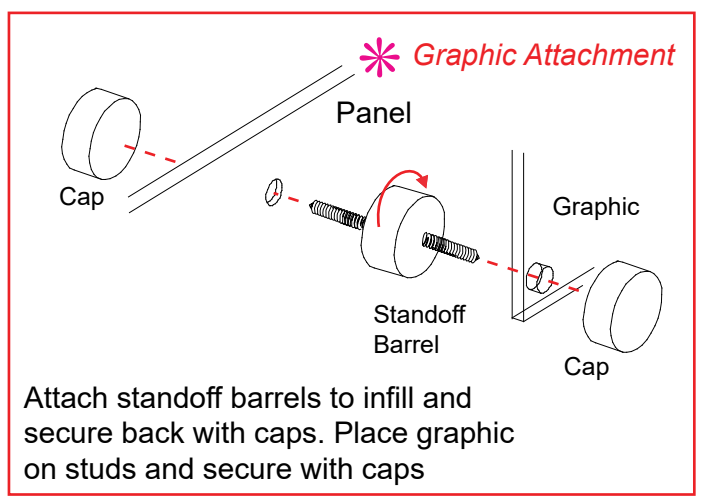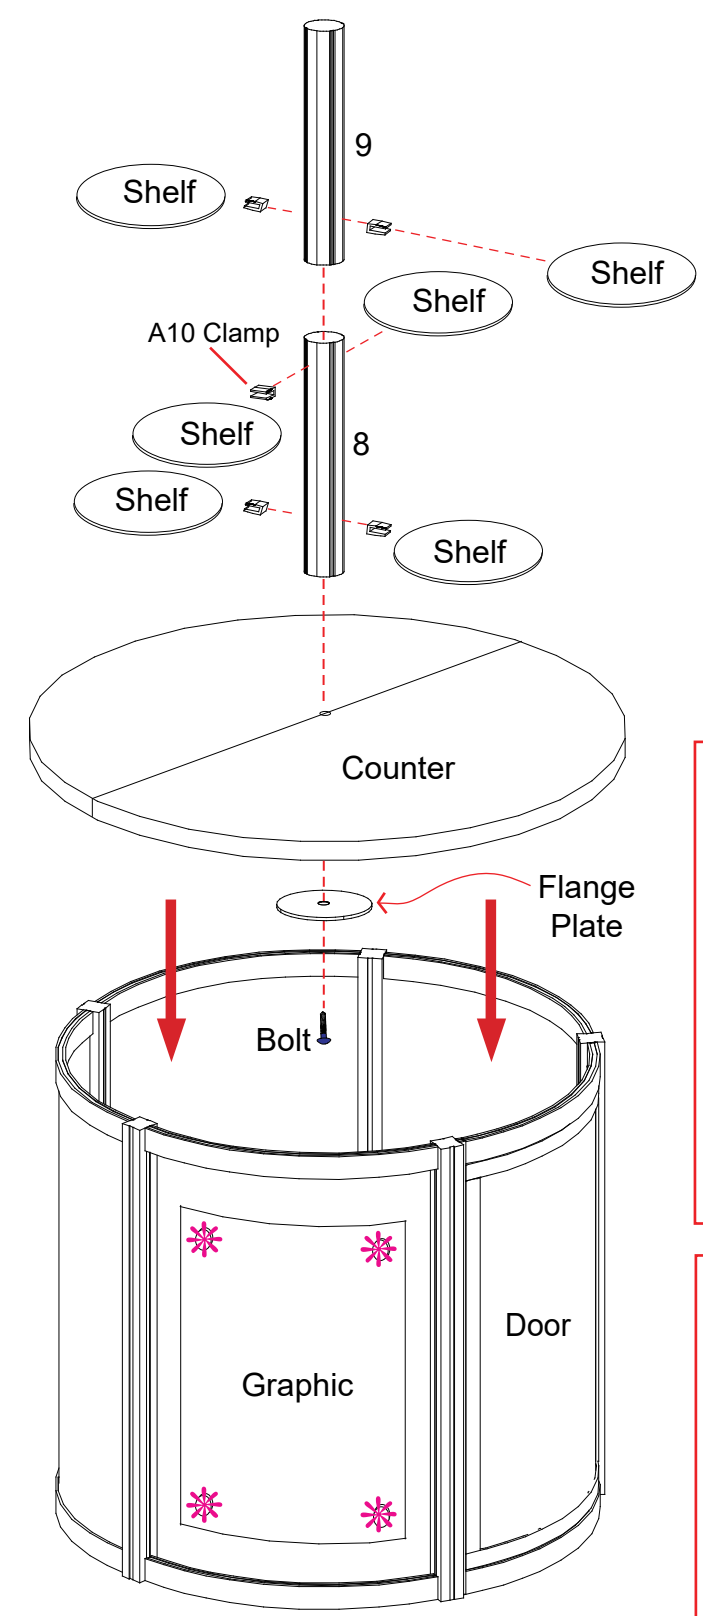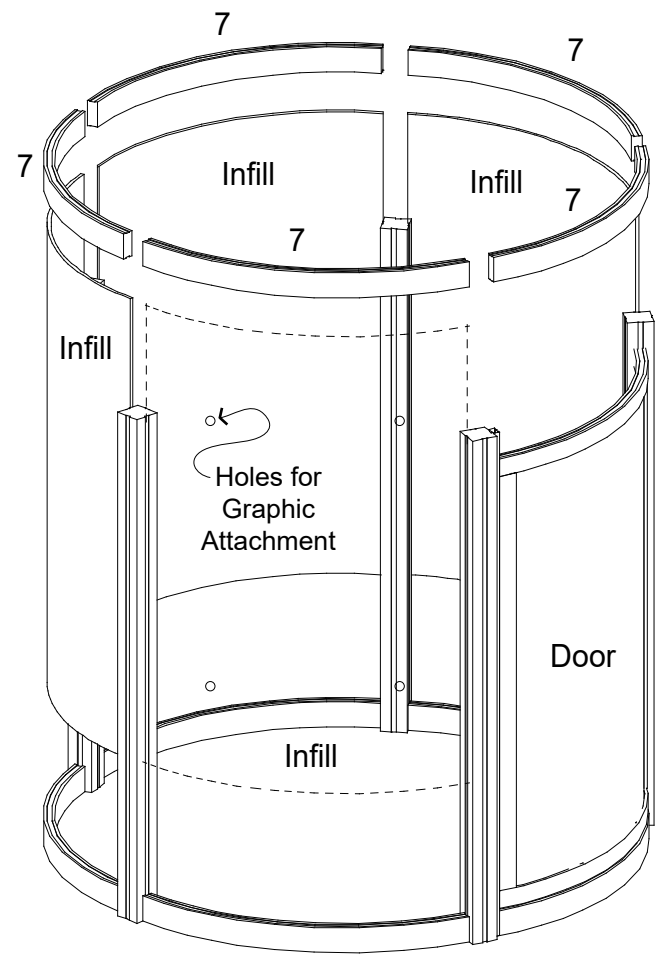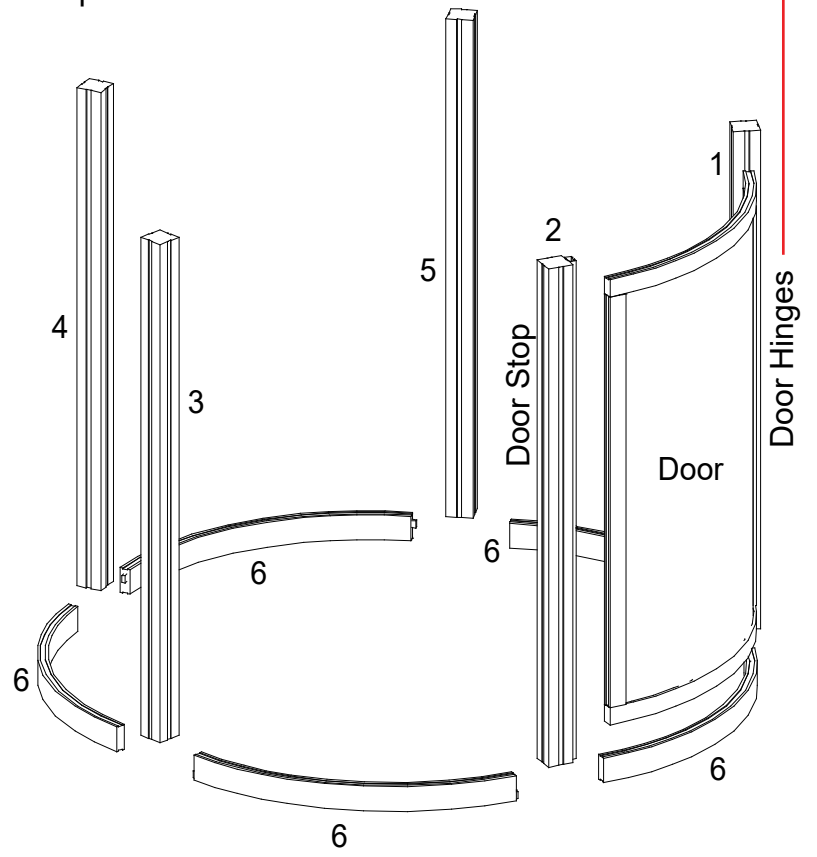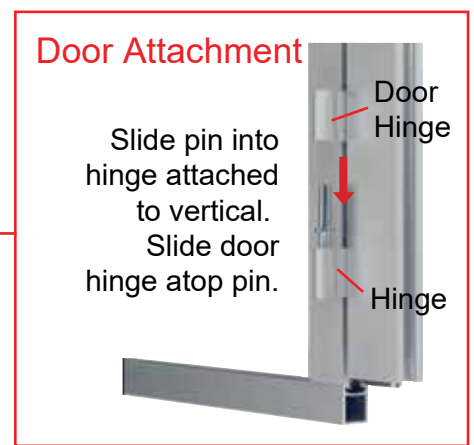

Item	Qty.	Description
A	1	Lower Curve Extrusion
B	1	Lower Curve Extrusion
C	1	Upper Curve Extrusion
D	1	Upper Curve Extrusion
E	1	Vertical Extrusion with Pill Slot
F	1	Vertical Extrusion
G	2	Horizontal Extrusion

- Steps:
- 1) Connect curve extrusions together [A to B and C to D].
  - 2) Attach vertical extrusions [E and F] between assembled rings.
  - 3) Apply pillow case graphic to assembled ring.
  - 4) Attached horizontal extrusions [G] between vertical and assembled ring.

Note: Notch on graphic for horizontal to lock into

Note: Notch on graphic for horizontal to lock into

